

Welcome to the **nLight AIR Quick Start Guide**. This guide is a quick explanation of how to properly set up your new system in the most efficient way possible.

Introduction

Note: Please be aware that due to our robust end-to-end security implementation, certain actions during setup require time to process.

STEP 1

Install and energize your nLight AIR enabled devices. At least one group of nLight AIR devices must be installed and powered prior to using the **CLAIRITY™+** mobile app. It is important to note that if you are working with a linked **nLight ECLYPSE™**, you will be able to use the SensorView software program for further programming, but you must first setup devices using the **CLAIRITY+** app.

STEP 2

Download and install the **CLAIRITY+** app to your device. This is a free app available for download from the **App Store** or **Google Play**. Once in the app, sign up and log in. For an in-depth, step-by-step process, please refer to the **CLAIRITY+** User Guide on our website at www.acuitybrands.com/nlight. Once your site is created, we recommend that you share your site access with others for continued maintenance and further repurposing, which can be done online at <https://air.acuitynext.com>.

STEP 3

Once you've created your site, the process is simple. Create a group to network your devices together, identify your devices and add them to your group, and then apply control behaviors to a zone of devices in your group. Click Save and verify operation.


nLight® AIR Quick Start Guide



The CLAIRITY+ mobile app is a single app launcher that provides a variety of connected lighting applications for contractors, sales agents or facility maintenance professionals. Within this app are mobile applications from various brands, including nLight, Sensor Switch, Lithonia Lighting, and IOTA.


Getting Started & Grouping Devices

STEP 1




From the CLAIRITY+ home screen select nLight AIR, SSI JOT, or Connected Life Safety. Select nLight AIR Products.

STEP 2

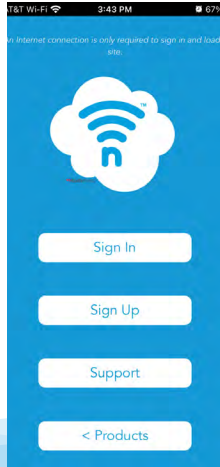


Create an account and sign-in to the app. It may take a little time to log in to ensure proper security is in place.

STEP 3

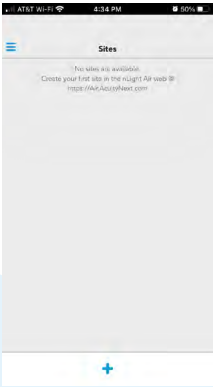


Once signed in select the plus (+) button at the bottom of the page to create a new site.

STEP 4

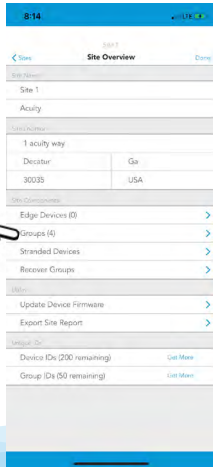


Enter the name and address information for your site, and then select Groups under Site Components.

STEP 5



Create a new Group by selecting the plus (+) button at the bottom of the screen. Once a group has been created, select **Devices** to begin adding devices.

STEP 6

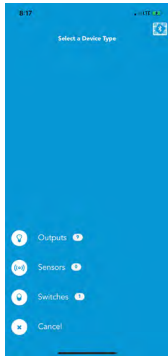

The device layout page is where you will be able to add and see the devices that are in your group. To begin simply tap the plus (+) button in the bottom left corner and select which of the device types you would like to add (Outputs, sensors, switches).

STEP 7

Tap **Identify** next to a device in the device list to make a device blink. Once you have correctly identified a device, tap the arrow next to identify and tap a space to place it on the grid.

STEP 8

Once you have added all of the devices to your group, select **Done** in the top right corner to begin creating behavior zones and customizing your settings.

Behavior Zones are used to program behaviors for the devices in your group.

Creating Behavior Zones

STEP 1

You have two options when creating a behavior zone. You can either select from the behavior zone templates (which have a description of what each does) or you can create your own behavior zone. Behavior zone templates apply to your entire group, and offer a quick option to save and finish the commissioning process.

STEP 2

When creating a behavior zone, once you have selected the behavior type you want, select the devices on the grid that you would like to be part of this zone. Devices will turn orange when they are part of a behavior zone.

STEP 3

You can toggle between the devices and settings tab to select which devices you would like to adhere to specific settings. Tap **Done** in the upper right corner to complete this process.

STEP 4

Once you are finished setting up your behavior zones, select **Save** in the top right corner. This will create your group, send behaviors to the devices, and complete the commissioning process.

